



## Installation manual and safety information



### Replacement pedal

Harley-Davidson  
Sportster S from model year 2021



## Caution



### Important safety advice:

- Working on motorcycles poses a safety risk. Some work may only be carried out by appropriately qualified personnel. Faulty work can have serious consequences and may pose a threat to life and health. Only undertake installation works if you are sufficiently qualified and have an official workshop manual as well as all relevant service notifications available. Otherwise, we strongly recommend that the installation is carried out or at least checked in a specialist workshop.
- Any work in relation to the installation, removal and tightening torque of original parts should always be carried out in compliance with the workshop manual.
- All screws must be attached with thread-locking fluid. However, this should only be done after the installation is complete.
- It is your responsibility to check the product regularly and to determine if a service or replacement is required.
- Please bear in mind that some products are safety-relevant parts of your vehicle. After a fall or collision, check the product and if there is the slightest indication of damage, you must completely replace it.
- Some products require registration.
- These products have been designed for a standard vehicle. ABM® Fahrzeugtechnik GmbH makes no warranty or guarantee of any kind for any damages whatsoever arising out of the combination with other component parts not tested by ABM, as a consequence of improper installation or inadequate maintenance.
- Brake fluid may damage painted surfaces and fairings. Use suitable means to protect all of the surfaces against damage.
- Please remember that the expansion tank is a safety-relevant part of your vehicle. Check the tank after a fall or collision and immediately completely replace it at the slightest indication of damage.

Please read the entire safety information and installation manual carefully.

- A motorcycle not securely positioned can fall over during the following work. Therefore, make sure that the motorbike is positioned on solid, flat ground and is secured against falling over and rolling away.
- Keep children and pets away from the work area.
- Protect removed parts from damage.
- When disassembling individual parts, please note which screws are used to fasten them. Keep these parts and screws and unless specified otherwise, reuse when assembling.
- The footrest is only pre-assembled for shipment. During installation, check all screws for firm fit.

## Installation:



Park the vehicle safely.



Slightly heat the gear shift at the thread.


Disassemble the original pedal.



Mount the pedal using the screws provided. Use thread-locking fluid (medium strength)

Tightening torque 10 Nm

Press the plastic covering provided into the screw head.

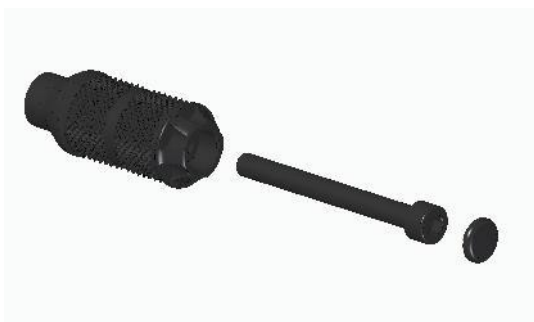

Afterwards, a test drive must be done! After completing the test drive, check that all components and screws are tight and functioning correctly.